



US009169726B2

(12) **United States Patent**
Snedden et al.

(10) **Patent No.:** **US 9,169,726 B2**
(45) **Date of Patent:** **Oct. 27, 2015**

(54) **METHOD FOR QUANTITATIVELY
ASSESSING CONNECTIVITY FOR WELL
PAIRS AT VARYING FREQUENCIES**

(75) Inventors: **John W. Snedden**, Leander, TX (US);
David M. Chorneyko, Kingwood, TX
(US); **Charlie S. Kim**, Houston, TX
(US); **Neal L. Adair**, Sugar Land, TX
(US)

(73) Assignee: **ExxonMobil Upstream Research
Company**, Houston, TX (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 688 days.

(21) Appl. No.: **13/392,440**

(22) PCT Filed: **Jul. 1, 2010**

(86) PCT No.: **PCT/US2010/040761**
§ 371 (c)(1),
(2), (4) Date: **May 23, 2012**

(87) PCT Pub. No.: **WO2011/049648**
PCT Pub. Date: **Apr. 28, 2011**

(65) **Prior Publication Data**
US 2013/0042677 A1 Feb. 21, 2013

Related U.S. Application Data
(60) Provisional application No. 61/253,342, filed on Oct.
20, 2009.
(51) **Int. Cl.**
E21B 47/00 (2012.01)
E21B 43/00 (2006.01)
E21B 49/00 (2006.01)
(52) **U.S. Cl.**
CPC **E21B 47/00** (2013.01); **E21B 49/00**
(2013.01); **G01V 2210/644** (2013.01); **G01V**
2210/65 (2013.01); **G01V 2210/66** (2013.01)

(58) **Field of Classification Search**
USPC 702/9, 11, 13, 14; 703/10; 166/50,
166/117.6, 242.1, 313
See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS
4,327,290 A 4/1982 Plasek
5,040,414 A 8/1991 Graebner
(Continued)

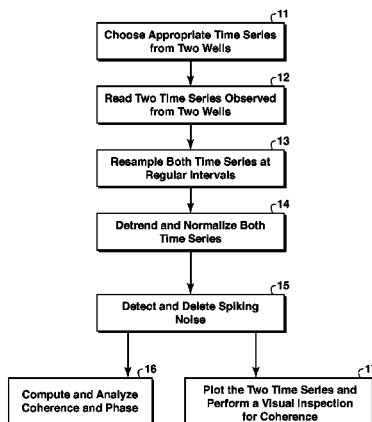
FOREIGN PATENT DOCUMENTS
GB 2145508 3/1985
WO WO 2007/007210 1/2007
(Continued)

OTHER PUBLICATIONS
Betancourt, Soraya S., Dubost, Francois X., Mullins, Oliver C.,
Cribbs, Myrt E., Creek, Jefferson L., Mathews, Syriac G.; "Predict-
ing Downhole Fluid Analysis Logs to Investigate Reservoir Connec-
tivity;" Dec. 4-6, 2007; International Petroleum Technology Confer-
ence; IPTC 11488; pp. 1-11.*
(Continued)

Primary Examiner — John Breene
Assistant Examiner — Christine Liao
(74) *Attorney, Agent, or Firm* — ExxonMobil Upstream
Research Company, Law Dept.

(57) **ABSTRACT**
Method for quantitatively assessing connectivity for well
pairs at varying frequencies. A time series of measurements
(12) is chosen for each of the two wells such that the particular
measurements will be sensitive to subsurface connectivity if
it exists (11). The two time series may then be pre-processed
by resampling to time intervals commensurate with response
time between the two wells (13), detrending the measure-
ments (14), and detecting and eliminating spiking noises (15).
Then the time series are transformed to the frequency domain
where coherence and phase between the two series are com-
pared for varying frequencies (16). This comparison is used to
make a determination of connectivity.

20 Claims, 7 Drawing Sheets



(56)

References Cited

U.S. PATENT DOCUMENTS

5,159,833	A	11/1992	Graebner et al.	
5,586,082	A	12/1996	Anderson et al.	
5,600,318	A	2/1997	Li	
5,757,663	A	5/1998	Lo et al.	
5,798,982	A	8/1998	He et al.	
5,835,882	A	11/1998	Vienot et al.	
5,848,379	A	12/1998	Bishop	
6,246,963	B1	6/2001	Cross et al.	
6,393,906	B1	5/2002	Vityk et al.	
6,514,915	B1	2/2003	Beyer et al.	
6,594,585	B1 *	7/2003	Gersztenkorn	702/14
6,661,000	B2	12/2003	Smith et al.	
6,754,588	B2	6/2004	Cross et al.	
6,810,332	B2	10/2004	Harrison	
6,826,483	B1	11/2004	Anderson et al.	
6,950,751	B2	9/2005	Knobloch	
6,980,940	B1	12/2005	Gurpinar et al.	
6,985,841	B2	1/2006	Barroux	
7,124,030	B2	10/2006	Ellis	
7,174,254	B2	2/2007	Ellis	
7,210,342	B1	5/2007	Sterner et al.	
7,249,009	B2	7/2007	Ferworn et al.	
7,251,566	B2	7/2007	Wu et al.	
7,280,932	B2 *	10/2007	Zoraster et al.	702/85
7,280,952	B2 *	10/2007	Butler et al.	703/10
7,297,661	B2	11/2007	Beyer et al.	
7,337,660	B2	3/2008	Ibrahim et al.	
7,344,889	B2	3/2008	Kelemen et al.	
7,387,021	B2	6/2008	DiFoggio	
7,395,691	B2	7/2008	Sterner et al.	
7,511,813	B2	3/2009	Vannuffelen et al.	
7,520,158	B2	4/2009	DiFoggio	
7,526,418	B2	4/2009	Pita et al.	
7,529,626	B1	5/2009	Ellis	
7,596,480	B2	9/2009	Fung et al.	
7,739,089	B2	6/2010	Gurpinar et al.	
7,996,198	B2	8/2011	Swanson et al.	
8,078,405	B2	12/2011	Delorme et al.	
8,370,122	B2 *	2/2013	Walker et al.	703/10
2002/0013687	A1	1/2002	Ortoleva	
2002/0049575	A1	4/2002	Jalali et al.	
2002/0067373	A1	6/2002	Roe et al.	
2002/0099504	A1	7/2002	Cross et al.	
2002/0120429	A1	8/2002	Ortoleva	
2004/0010374	A1 *	1/2004	Raghuraman et al.	702/13
2004/0148147	A1	7/2004	Martin	
2004/0210547	A1	10/2004	Wentland et al.	
2004/0220790	A1	11/2004	Cullick et al.	
2004/0254734	A1	12/2004	Zabalza-Mezghani et al.	
2005/0096893	A1	5/2005	Feraile et al.	
2005/0149307	A1	7/2005	Gurpinar et al.	
2005/0199391	A1	9/2005	Cudmore et al.	
2005/0209866	A1	9/2005	Veeningen et al.	
2005/0209912	A1	9/2005	Veeningen et al.	
2005/0234690	A1	10/2005	Mainguy et al.	
2005/0256647	A1	11/2005	Ellis	
2006/0014647	A1	1/2006	Beyer et al.	
2006/0041409	A1	2/2006	Strebelle et al.	
2006/0047489	A1	3/2006	Scheidt et al.	
2006/0052938	A1	3/2006	Thorne et al.	
2006/0092766	A1	5/2006	Shelley et al.	
2006/0235667	A1	10/2006	Fung et al.	
2006/0235668	A1	10/2006	Swanson et al.	
2006/0241867	A1	10/2006	Kuchuk et al.	
2006/0265204	A1	11/2006	Wallis et al.	
2006/0277012	A1	12/2006	Ricard et al.	
2006/0277013	A1	12/2006	Bennis et al.	
2006/0282243	A1	12/2006	Childs et al.	
2006/0287201	A1	12/2006	Georgi et al.	
2006/0293872	A1	12/2006	Zamora et al.	
2007/0005253	A1	1/2007	Fornel et al.	
2007/0011646	A1	1/2007	Chrisochoides et al.	
2007/0013690	A1	1/2007	Grimaud et al.	
2007/0016389	A1	1/2007	Ozgen	
2007/0143024	A1	6/2007	Michel et al.	

2007/0156377	A1	7/2007	Gurpinar et al.	
2007/0162235	A1	7/2007	Zhan et al.	
2007/0219724	A1	9/2007	Li et al.	
2007/0219725	A1	9/2007	Sun et al.	
2007/0242564	A1	10/2007	Devi	
2007/0265778	A1	11/2007	Suter et al.	
2008/0040086	A1	2/2008	Betancourt et al.	
2008/0059140	A1	3/2008	Salmon et al.	
2008/0065362	A1	3/2008	Lee et al.	
2008/0097735	A1	4/2008	Ibrahim et al.	
2008/0099241	A1	5/2008	Ibrahim et al.	
2008/0147326	A1	6/2008	Ellis	
2008/0173804	A1	7/2008	Indo et al.	
2009/0071239	A1	3/2009	Rojas et al.	
2009/0259405	A1 *	10/2009	Spears	702/14
2011/0040536	A1	2/2011	Levitani	
2011/0191080	A1	8/2011	Klie	
2011/0251796	A1	10/2011	Waid et al.	

FOREIGN PATENT DOCUMENTS

WO	WO 2007/063442	6/2007
WO	WO 2008/100614	8/2008
WO	WO 2009/094064	7/2009
WO	WO 2010/008647	1/2010

OTHER PUBLICATIONS

Bahorich, Mike, Farmer, Steve; "3-D seismic discontinuity for faults and stratigraphic features: The coherence cube"; The Leading Edge; 1995; pp. 1053-1058.*

Wu, Zhaohua, Huang, Norden, Long, Steven, Peng, Chung-Kang; "On the trend, detrending, and variability of nonlinear and nonstationary time series;" 2007; The National Academy of Sciences of the USA; vol. 104, No. 38; pp. 1-10.*

Ainsworth, R.B., (2005), Sequence Stratigraphic-Based Analysis of Depositional Architecture—A Case Study From A Marginal Marine Depositional Setting, Petroleum Geoscience, vol. 11, pp. 257-276.

Allen, J.R.L., (1978), Studies In Fluvial Sedimentation; An Exploratory Quantitative Model For The Architecture Of Avulsion-Controlled Alluvial Sites, Sedimentary Geology, vol. 21; 2, pp. 129-147.

Barton, M., et al., Understanding Hydrocarbon Recovery in Deepwater Reservoirs; Modeling Outcrop Data In The Third Dimension, 2004, AAPG, vol. 13, pp. 11.

Bradley, D.A., et al. (1968), "Improving Prudhoe Bay Pulse-Test Data by Processing with Fourier Transforms," SPE 18124, 1968 SPE Annual Tech. Conf. and Exh., Oct. 2-5, pp.

Chorneyko, D.M. (2006), Real-Time Reservoir Surveillance Utilizing Permanent Downhole Pressures—An Operator's Experience, SPE 103213, 2006 SPE Annual Tech. Conf. and Exh., Sep. 24-27.

Cooley, J.W., et al. (1965), "An algorithm for the machine calculation of complex Fourier series," *Math. Comput.* 19, pp. 297-301.

Elshahawi, H., et al., (2000), Correcting For Wettability And Capillary Pressure Effects On Formation Tester, Oct. 1-4, SPE 63075.

Firoozabadi, A., et al., (1998), Surface Tension Of Water-Hydrocarbon Systems At Reservoir Conditions, Journal of Canadian Petroleum Technology, Reservoir Engineering, vol. 41.

Gainski, M., et al., (2008), the Schiehallion Field: Detection Of Reservoir Compartmentalisation and Identification Of New Infill Targets Using 4D Seismic Surveys and Dynamic Production Data, Reservoir Compartmentalization [Online], Mar. 5-6, pp. 32. Retrieved from the Internet: URL: http://www.geolosc.org.uk/webdav/site/GSL/shared/pdfs/events/abstracts/Reservoir_AbstractBook.pdf, pp. 32.

Hollaender, F., et al. (2002), Harmonic Testing for Continuous Well and Reservoir Monitoring, SPE 77692, 2002 SPE Annual Tech. Conf. and Exh. Sep. 29-Oct. 2, 2002, pp.

James, W.R., et al., (2004), Fault-Seal Analysis Using A Stochastic Multi-Fault Approach, pp. 885.

Jansen, F.E., et al. (1997), Application of Wavelets to Production Data in Describing Inter-Well Relationships, SPE 38876, 1997 SPE Annual Tech. Conf. and Exh., Oct. 5-8, 1997, pp.

(56)

References Cited**OTHER PUBLICATIONS**

Justwan, H., et al., Characterization Of Static and Dynamic Reservoir Connectivity For The Ringhorne Field, Through Integration of Geochemical and Engineering Data: Reservoir Compartmentalization.

Justwan, H.K., et al., (2008), Unraveling Dynamic Fluid Connectivity Through Time-Lapse Geochemistry—From Example From the Ringhorne Field, Norway, AAPG Int'l Conf and Exhibition, Cape Town, South Africa.

King, P.R., (1990), The Connectivity and Conductivity Of Overlapping Sand Bodies, In, Buller, A.T, et al, Eds, North Sea Oil and Gas Reservoirs; II, Proceedings Of The North Sea Oil And Gas Reservoirs Conference [Book, Conference Document], pp. 353-362.

Lame, D.K., et al., (2006), Connectivity Of Channelized Reservoirs: A Modeling Approach, Petroleum Geoscience, vol. 12, pp. 291-308.

Lescoffit, G., et al., (2005), Quantifying The Impact Of Fault Modeling Parameters On Production Forecasting For Clastic Reservoirs, AAPG Hedberg Series, No. 2, pp. 137-149.

McCain, W.D., Jr., (1991), Reservoir-Fluid Property Correlations—State Of The Art, SPERE, pp. 266.

Manzocchi, T., et al., (2008), Sensitivity Of The Impact Of Geological Uncertainty On Production From Faulted And Unfaulted Shallow-Marine Oil Reservoirs: Objectives And Methods, Petroleum Geoscience, vol. 14, pp. 3-15.

Olsen, S. et al. (2005), "Automatic Filtering and Monitoring of Real-Time Reservoir and Production Data," SPE 96553, 2005 SPE Annual Tech. Conf. and Exh., Oct. 9-12, 2005, pp.

Rai, H. (2005), "Analyzing Rate Data from Permanent Downhole Gauges," Report submitted to Dept. of Petroleum Engineering, Stanford University, 70 pgs.

Richards, B., et al., (2008), Reservoir Connectivity Analysis Of A Complex Combination Trap Terra Nova Field, Jeanne d'Arc Basin, Newfoundland, Canada, Reservoir Compartmentalization, London Geological Society, pp. 59.

Sales, J.K., (1997), Seal Strength Vs. Trap Closure; A Fundamental Control On The Distribution Of Oil And Gas, In: Seals, Traps, And The Petroleum System, AAPG, vol. 67, pp. 57-83.

Schlumberger, Managing Uncertainty In Oilfield Reserves, Middle East Well Evaluation Review, (2004), vol. 12.

Snedden, J.W. et al. (1988), "Storm and Fairweather Combined-Flow on the Central Texas Continental Shelf," *Jour. Sed. Pet.* 58, pp. 580-595.

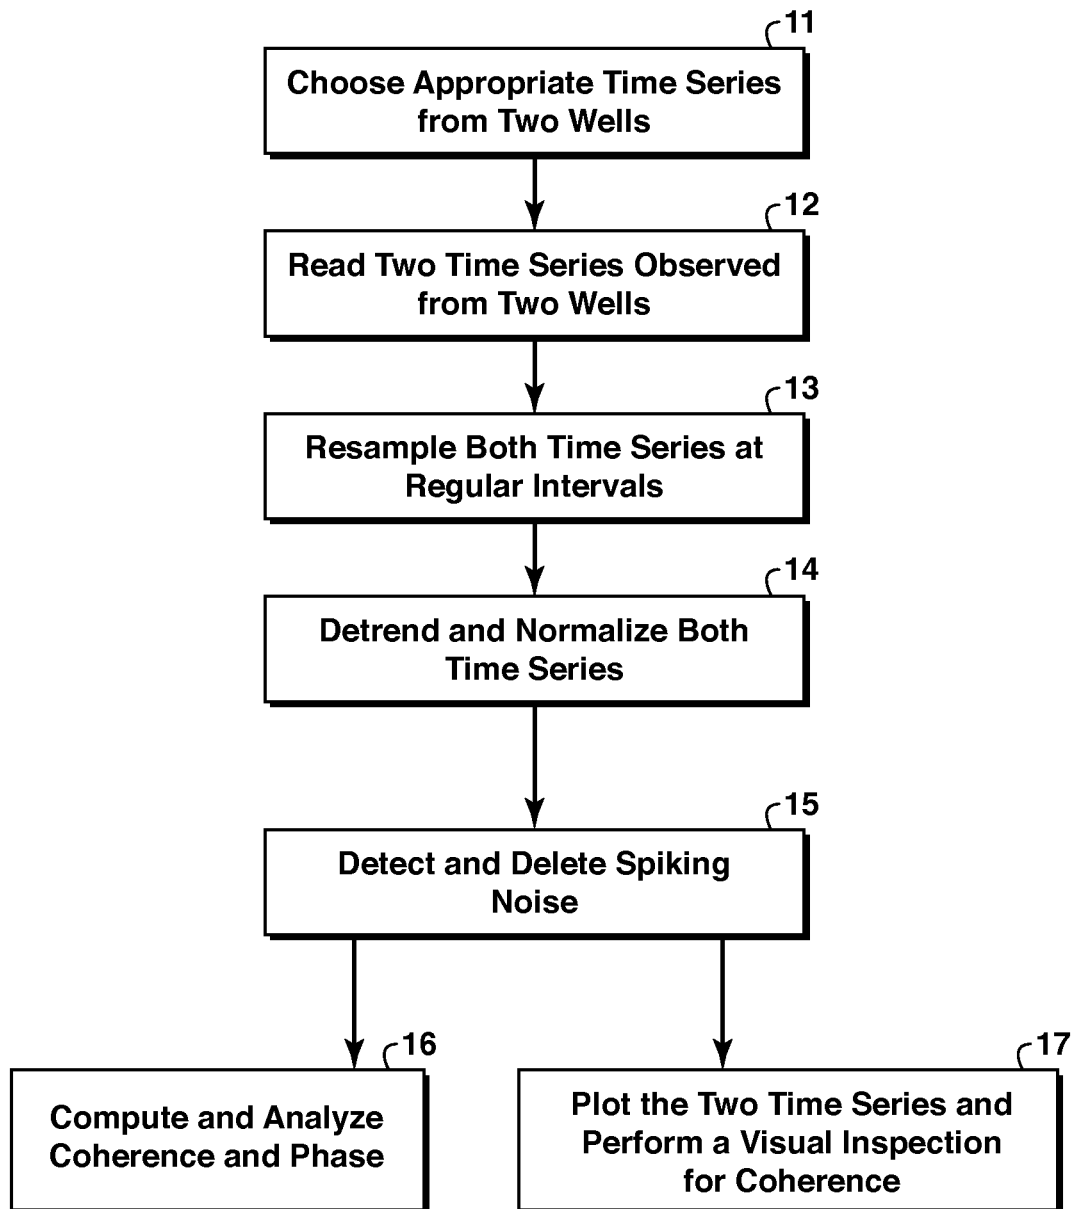
Snedden, J.W., et al. (2007), Reservoir Connectivity: Definitions, Examples And Strategies, IPTC 11375.

Sumpter, L., et al., (2008), Early Recognition Of Potential Reservoir Compartmentalization, Reservoir Compartmentalization, London Geological Society, pp. 84.

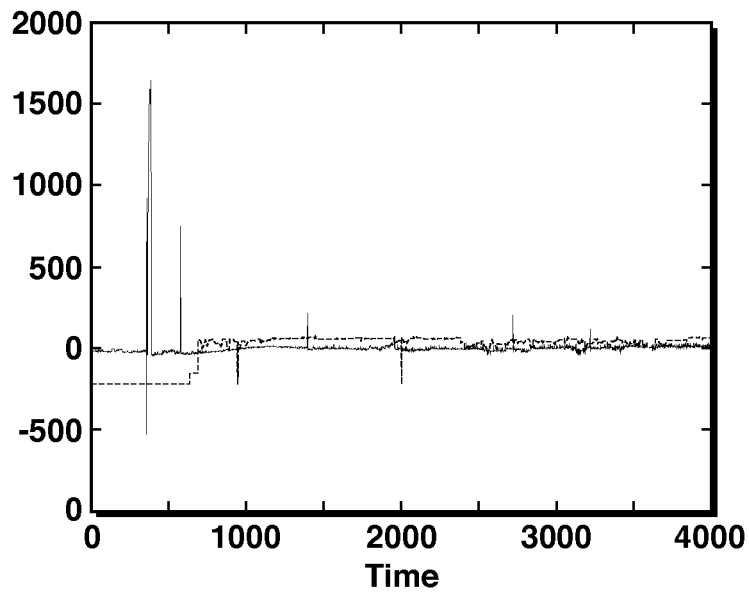
Sweet, M.L., et al., (2007), Genesis Field, Gulf Of Mexico: Recognizing Reservoir Compartments On Geologic And Production Timescales In Deep-Water Reservoirs, AAPG, vol. 91, pp. 1701-1729.

Vrolijk, P.J., et al., (2005), Reservoir Connectivity Analysis—Defining Reservoir Connections And Plumbing, SPE 93577-MS.

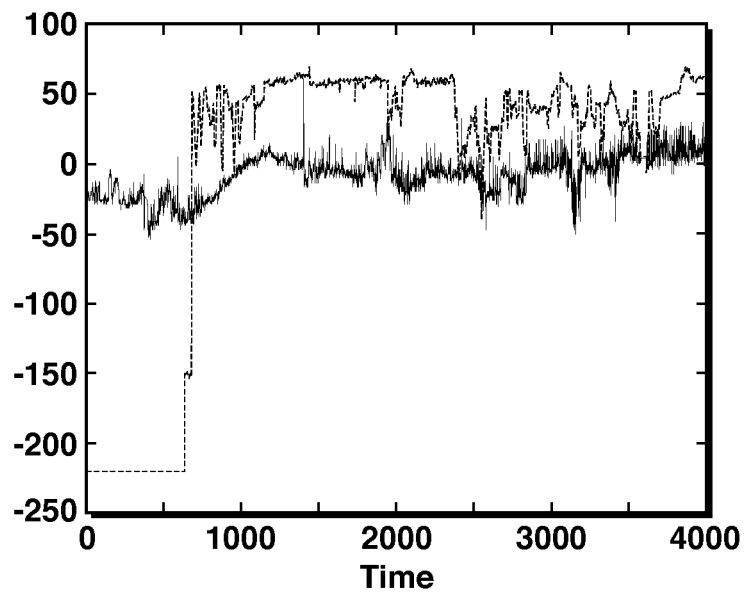
* cited by examiner

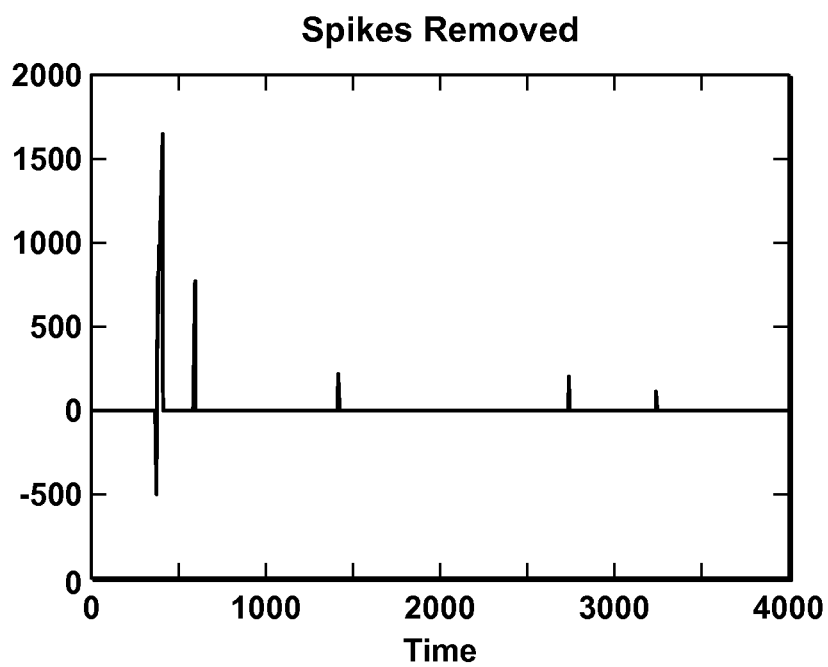
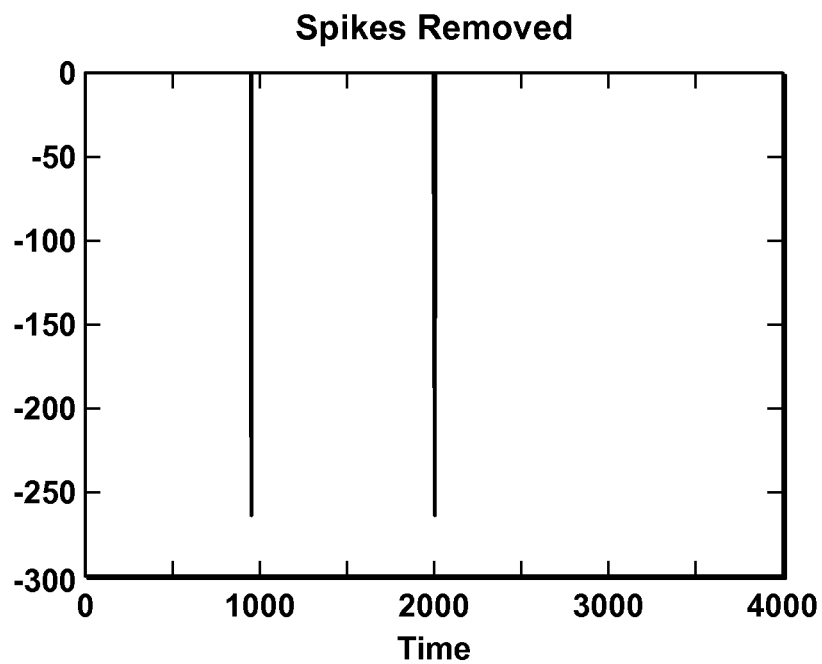
**FIG. 1**

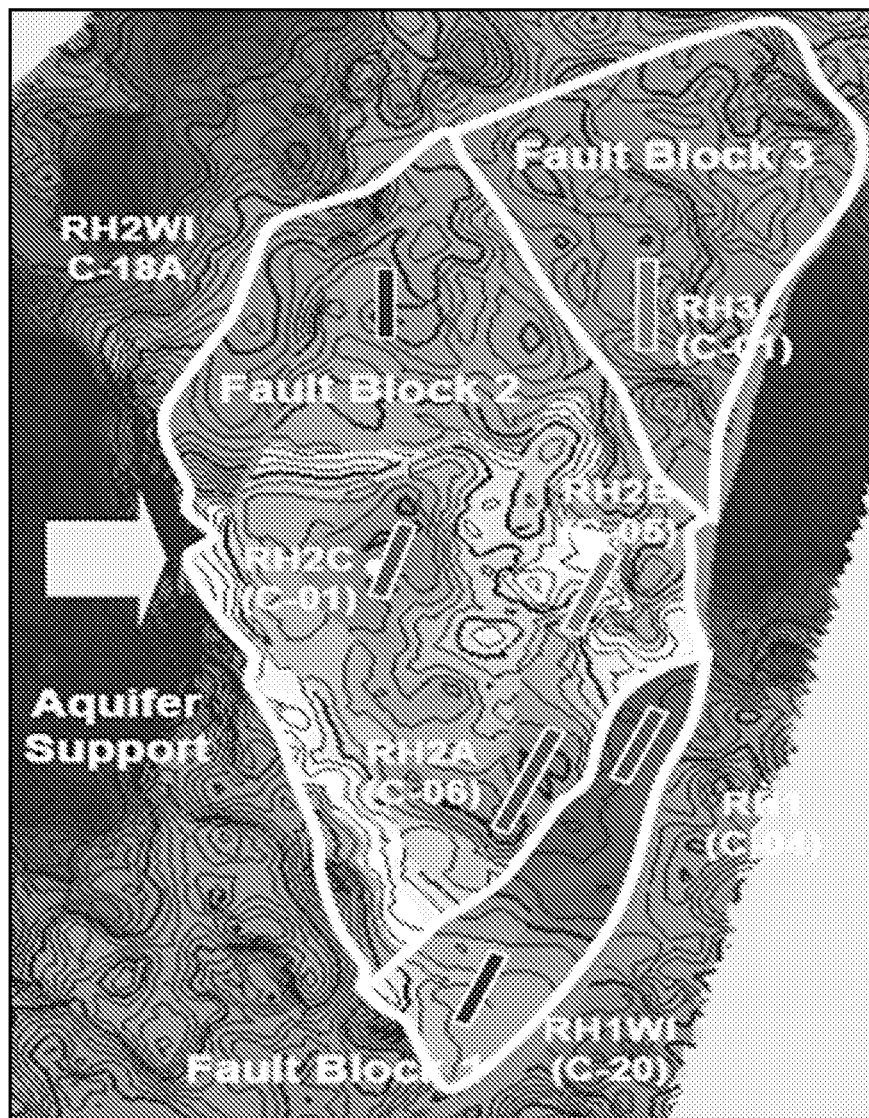
Normalized Pressures: Zero Meaned with New Standard Deviation

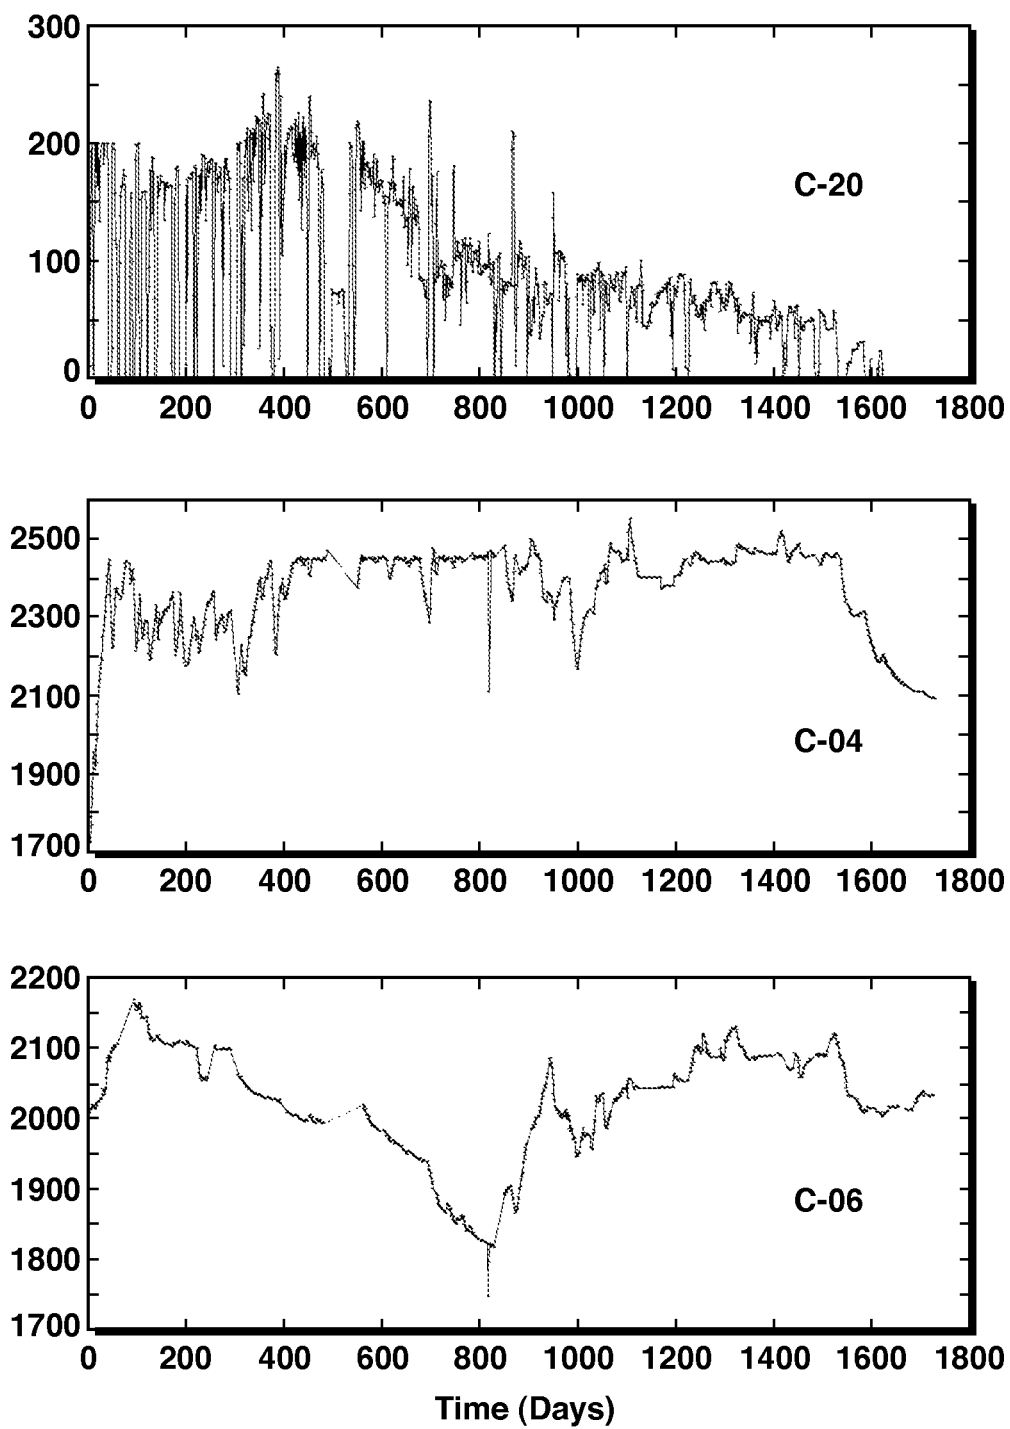
**FIG. 2**

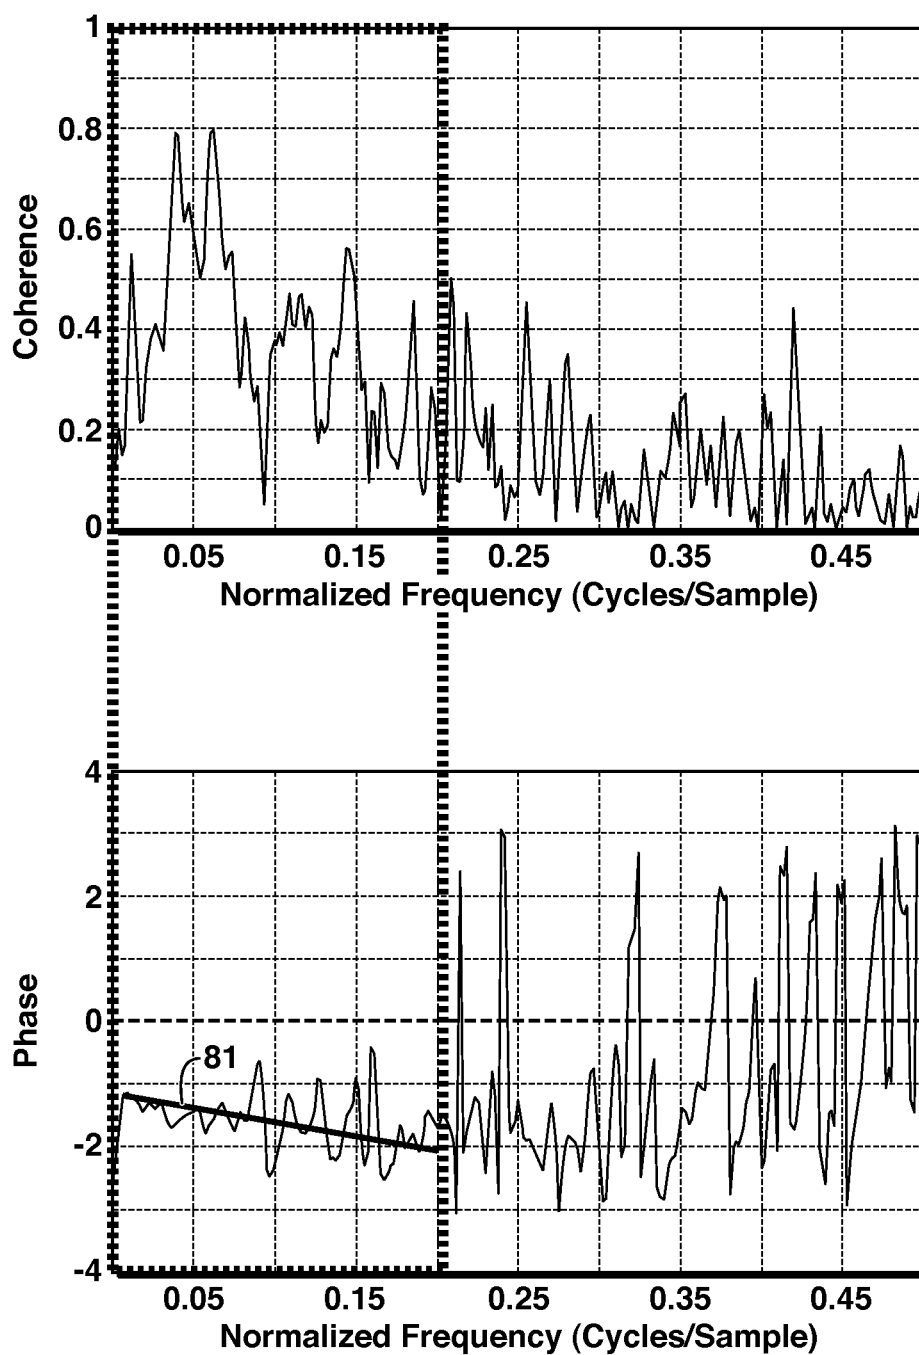
Spike Removed Pressures

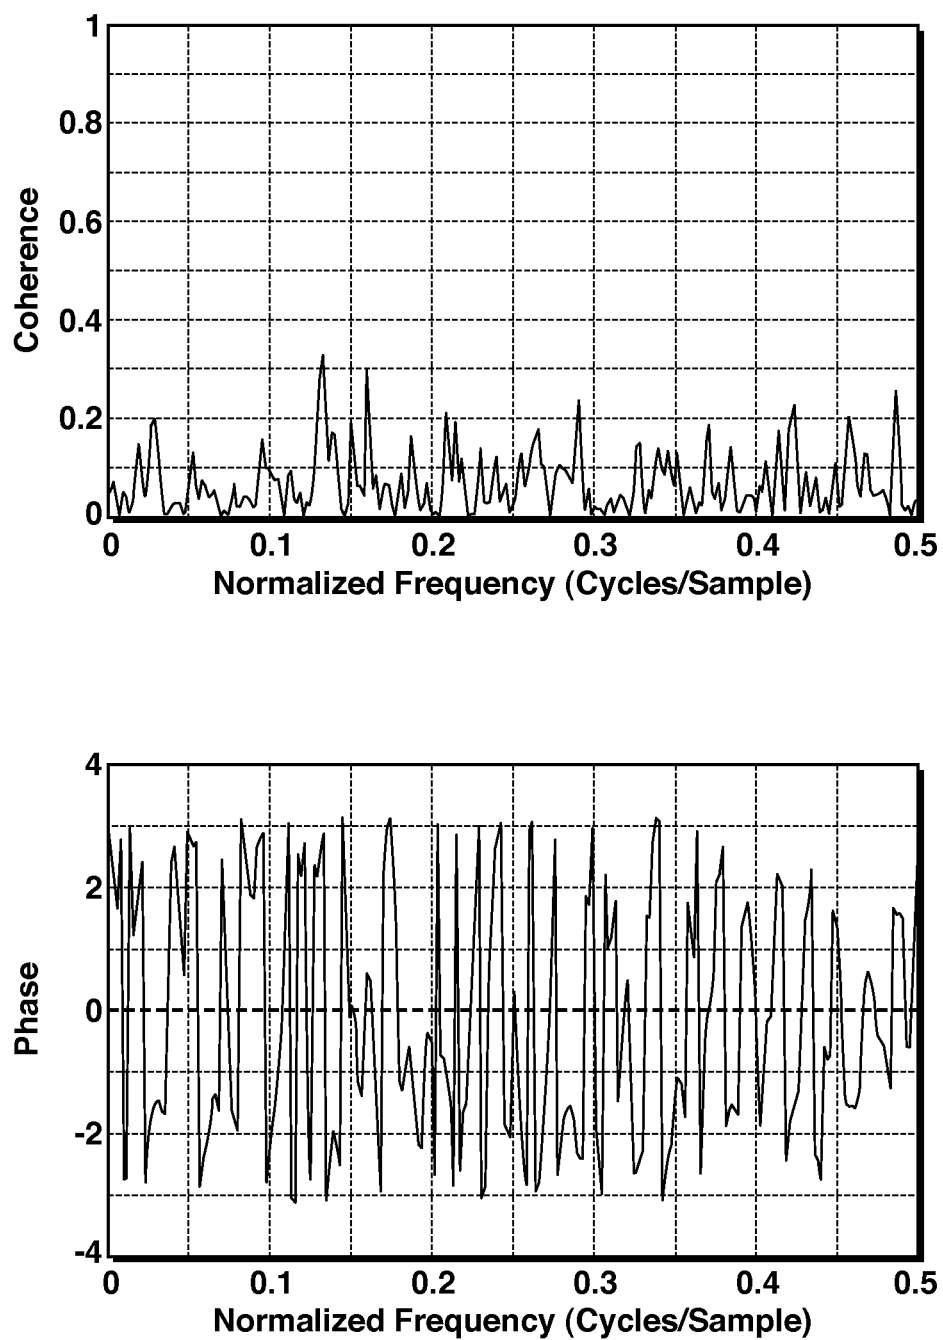
**FIG. 3**

**FIG. 4****FIG. 5**

**FIG. 6**

**FIG. 7**

**FIG. 8**

**FIG. 9**

1

METHOD FOR QUANTITATIVELY ASSESSING CONNECTIVITY FOR WELL PAIRS AT VARYING FREQUENCIES

CROSS REFERENCE TO RELATED APPLICATION

This application is the National Stage entry under 35 U.S.C. 371 of PCT/US2010/040761, that published as WO 2011/049648 and was filed on 1 Jul. 2010, which claims the benefit of U.S. Provisional Application No. 61/253,342, filed on 20 Oct. 2009, each of which is incorporated herein by reference, in its entirety, for all purposes.

FIELD OF THE INVENTION

The invention relates generally to the field of hydrocarbon prospecting and production, and more particularly to a method for quantitatively assessing connectivity for well pairs at varying frequencies.

BACKGROUND OF THE INVENTION

This section is intended to introduce various aspects of the art, which may be associated with embodiments of the disclosed techniques. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the disclosed techniques. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

Downhole instrumentation in oil and gas wells continues to evolve, with more diverse measurement capabilities being installed in an ever-increasing number of fields. Permanent downhole monitoring (PDM) gauges, measuring pressure and temperature, provide nearly instantaneous signals from the subsurface reservoir. The oil and gas industry have started to collect immense quantities of downhole information, used primarily for reservoir surveillance. This same information provides valuable information about the internal "connectivity" of the reservoir, that is, the ease with which fluids communicate through complex compartments and pathways to reach the borehole. However, interpreting the connectivity signal and separating it from white noise, man-made artifacts, and equipment issues remains challenging. In addition, simple qualitative, often visual, comparisons between producing wells and injector-producer pairs are inadequate to properly characterize the intricate, multi-tiered connectivity inherent to both sandstone and carbonate reservoirs.

The simplest method, and what is commonly done, to determine inter-well connectivity from permanent downhole pressure data is to plot or visually overlay the pressures from different wells versus time and look for dependent pressure behavior. For example, if one well is shut-in, yet the buildup pressures in this well are declining while another well is on production, it may be inferred the wells are in hydraulic communication and thus connected. If the visual technique does not work, the next option is to build a reservoir model and history match individual well bottom hole pressures. The objective is to see if connectivity between wells has to be present for a valid history match, and to estimate the degree of connectivity.

While simple in theory, the visual comparison technique is often difficult to apply in practice because the bottom hole pressures may be affected by many other transient factors such as rate changes and communication from more than one well. Visual inspection may not be able to isolate the subtle or independent impact of another well's production or injection

2

on the permanent downhole pressure record. The history matching technique is time consuming and non-unique.

There is a need for a fast and reliable technique to determine inter-well connectivity from permanent bottom hole pressure data. Wells with permanent down hole gauges are now common (Chorneyko, 2006). The volume of data (up to 1 pressure reading per second being recorded) and the amount of time required for processing (filter, de-noise, and compress) and analysis are factors that limit use of the data. Early and accurate diagnoses of reservoir connectivity will improve the quality and predictability of full-field simulations. The present inventive method fulfills this need and deals with the complicating factors at work.

SUMMARY OF THE INVENTION

In one embodiment, a method is disclosed for quantitatively assessing connectivity between two wells in a subsurface region for the purpose of planning or managing production of hydrocarbons from the subsurface region, comprising comparing spectral content of a time series of measurements from one well to spectral content of a time series of measurements from the other well.

BRIEF DESCRIPTION OF THE DRAWINGS

Disclosed aspects and their advantages will be better understood by referring to the following detailed description and the attached drawings in which:

FIG. 1 is a diagram of basic steps for analysis of connectivity between two wells;

FIG. 2 is a plot of an injection well pressure in gray (dashed line) and production well pump intake pressure (PIP) (solid line) in black, where pressures are normalized and zero meaned with a new standard deviation;

FIG. 3 is a plot of an injection well pressure (dashed line) and production well PIP in black after spurious spike noises are removed from the pressure records;

FIG. 4 is a plot of spike noises removed from the injection pressures in FIG. 2;

FIG. 5 is a plot of spike noises removed from production well pump intake pressures in FIG. 2;

FIG. 6 is a map of a subsurface field with three fault compartments;

FIG. 7 compares charts of daily injection rate at well C-20 and bottom hole pressures at wells C-04 and C-06;

FIG. 8 is a plot of coherence spectrum (upper chart) and phase spectrum (lower chart) for two time series of well C-20 injection rates and well C-04 bottomhole pressures; and

FIG. 9 is a plot of coherence spectrum (upper chart) and phase spectrum (lower chart) for two time series of well C-20 injection rates and well C-06 bottomhole pressures.

Example embodiments will now be described. To the extent that the following is specific to a particular embodiment or a particular use, this is intended to be illustrative only, and is not to be construed as limiting the scope of the invention. On the contrary, it is intended to cover all alternatives, modifications and equivalents that may be included within the scope of the invention, as defined by the appended claims.

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS

At the outset, and for ease of reference, certain terms used and their meanings as used in this context are set forth. To the extent a term used herein is not defined below, it should be

given the broadest definition persons in the pertinent art have given that term as reflected in at least one printed publication or issued patent.

As used herein, the term “connectivity” refers to a measure of the hydraulic communication (or lack thereof) between points within a geologic zone. Connectivity is closely related to the reservoir internal geometry and is commonly a primary factor controlling hydrocarbon production efficiency and ultimate recovery.

The term “time series” means measurements of some physical parameter as a function of discrete time, i.e. at some pre-determined sampling time intervals. Analysis of a single time series is made using standard published methods for decomposing the data into a spectrum of cycles of different lengths (see, for example, Cooley and Tukey, 1965). Coherence and phase spectral analysis, referred to herein as “cross-spectral analysis,” involves comparing decomposed cycles in two time series.

Some portions of the detailed description that follow are presented in terms of procedures, steps, logic blocks, processing and other symbolic representations of operations on data bits within a computer memory. These descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. A procedure, step, logic block, process, or the like, is conceived and understood herein to be a self-consistent sequence of steps or instructions leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, although not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated in a computer system.

While for purposes of simplicity of explanation, the illustrated methodologies are shown and described as a series of blocks, it is to be appreciated that the methodologies are not limited by the order of the blocks, as some blocks can occur in different orders and/or concurrently with other blocks from that shown and described. Moreover, less than all the illustrated blocks may be required to implement an example methodology. Blocks may be combined or separated into multiple components. Furthermore, additional and/or alternative methodologies can employ additional, not illustrated blocks. While the figures illustrate various serially occurring actions, various actions could occur concurrently, substantially in parallel, and/or at substantially different points in time.

There have been isolated examples of transformation of dynamic reservoir engineering information into the frequency domain. Bradley and Allen (1968) used Fourier transforms to process surface pressures in two observation wells that were part of a traditional pulse testing program. Jansen and Kelkar (1987) showed how the wavelet transformation can decompose production rate data into a frequency component that can be used for analysis of inter-well relationships. Unlike Fourier transforms, the wavelet functions do not have infinite duration and they allow users to divide a complicated signal into several components and process the components individually. Hollaender, Hammond, and Gringarten (2002) looked at the practical aspects of using periodic rate variations for testing oil wells. Harmonic well testing has many desirable characteristics but it requires much longer testing sequences than conventional testing for the same information. Olsen and Nordtvedt (2005) applied automated wavelet techniques for filtering and compressing real-time pressure data. Signal processing techniques have been applied to process pressure data from permanent downhole gauges in indi-

vidual wells. None of these applications involve permanent downhole gauges and rates in multiple wells, as is discussed herein.

In one aspect, cross-spectral analysis is used to provide a way to compare multiple time series in order to deduce linkages. The cross-spectral analysis is used to investigate similarity, or coherence, between two time series at varying frequency. For example, Snedden et al. (1988) disclose collecting real time data of wind, tides, waves, and currents and using cross-spectral analysis in order to understand the forcing mechanisms on continental shelves and the deep ocean. Indications of similarity or dissimilarity between well pairs' pressure histories are used to infer subsurface connectivity between the two wells. PDM data may readily be collected on a nearly continuous basis, and these accumulated metrics form one or more time series datasets, e.g. a single well or multiple wells.

According to the disclosed techniques, pairs of wells can be screened for hydraulic connectivity. The flow chart of FIG. 1 shows basic steps of an example embodiment. At step 11, appropriate time series from two wells are chosen. Care should be taken to select two monitor signals that can be potentially linked only by subsurface reservoir communication. For example, if two wells are commingled into the same production entity, they will show coherence because they are connected at the surface facilities. If the reservoir is multi-layered and completed in many layers, the determination of connectivity from coherence spectrum may be difficult because not all layers may be in communication. Permanent downhole monitoring (PDM) gauges generally provide downhole temperature and pressure measurements. (Recording readings at time intervals from such gauges is an example of step 12.) These devices are “permanent” in the sense that they are maintained for the life of the borehole and are different than temporary tools measuring pressure, etc. in the subsurface for short spans of time (e.g. Repeat Formation Testers, Modular Dynamic Testers, etc.) prior to well completion. Typical measurements from PDM's are in digital form and the sampling intervals are in the order of seconds. Since the response time (i.e. the delayed effect) between two wells would typically be on the order of tens of minutes or hours, both time series preferably are re-sampled at larger time intervals (step 13). Then, one or more of several other pre-processing techniques may optionally be used to make the two time series more suitable for a cross-spectral coherence analysis. These can include steps such as detrending and normalizing the two time series (step 14), eliminating buildup sequences, eliminating spurious spikes (step 15), and applying low-pass/band-pass filters. Spurious spike elimination is explained below, and the other pre-processing techniques are well known to practitioners in the technical field. At step 16, coherence and phase spectra between two time series are computed and analyzed to evaluate fluid connectivity between two wells. Alternatively or additionally, at step 17 coherence may be determined or estimated by plotting the two time series and performing a visual inspection for coherence. Further details of some of the method steps follow next.

Choice of Two Time Series (Step 11):

Different types of data suitable for reservoir connectivity analysis when displayed in time sequence form include downhole pressure, flow rate, and injection rate at injection wells and production wells. One can use downhole pressure and flow rate from one well to test the effectiveness of the cross spectral analysis and preprocessing steps. Or, one can use downhole pressure or flow rate in one well and injection rate in another well to evaluate the connectivity. Yet, another example is to apply shut-in's (periods when a well is not

5

flowing) in one well and compare flow rates and/or downhole pressure changes on the other wells. Whatever the choice of the time series from the two wells, the final analysis (step 16) of the hydraulic connectivity should preferably include known reservoir configuration, possible effect of other wells in the vicinity, effect of surface equipment, and other man-made ambient noises that might be still present in the two time series. This is because existence of coherence in the cross-spectral analysis does not necessarily mean hydraulic connectivity.

Sampling Intervals and Method of Resampling the Various Time Series (Step 13):

Typical measurements obtained from PDM are in digital form and the sampling intervals are on the order of seconds. From the viewpoint of determining internal connectivity of a reservoir, a pressure or a flow rate change in an injection well would affect a bottom-hole pressure at a production well in time scales of hours and days instead of seconds, i.e. the effect would be delayed by that much time. Therefore, raw measured pressure data should be preprocessed and re-sampled at a coarser and regular sampling interval before being subjected to a cross spectrum analysis. Based on the observation that an injection pressure has a cumulative effect on production wells, one aspect of the present techniques uses average injection pressures at sampling intervals as injection pressures at the sampling times. Compared to this strategy, a normal re-sampling method would compute pressures at designated sampling times by interpolating the closest two measured pressures. Re-sampling pressure data or flow rate data using a sampling rate in the range of 20 minutes to a few hours may give good results for determining connectivity between wells. The sampling interval can be as large as 24 hours. This data reduction of two to three orders of magnitude can make the computation time as well as the storage of pressure data more manageable.

Detrending and Normalizing Two Time Series (Step 14):

Even though the cross spectral analysis technique does not require two time series to be stationary, it is recommended to detrend the two signals. To do this, a linear trend for each time series is estimated and the estimated linear trend is eliminated from each time series. Even though normalization is not required for an accurate cross spectral analysis, each time series is preferably normalized, for example by dividing each time series by its standard deviation. Such normalization is may assist in allow proper visual inspection of the two time series.

Spiking Noise Reduction by Using a Nonlinear Filter (Step 15):

Injection rates and/or bottom-hole pressures are routinely corrupted by non-geologic and artificial, (e.g. man-made or facility-related) spurious noises. One of the most disturbing types of noises is a spike noise as shown in FIG. 2, where the amplitudes of the spike noises in injection pressure (dashed line) and pump intake pressure (solid line) are so large that variations in pressure are hard to observe. In one aspect, a nonlinear filter is used to detect and eliminate these spike noises. This nonlinear filter is of length $2N+1$, where N is an integer. For a single time series $p(i)$, $i=0$ to M , this nonlinear filter computes a median value $m(i)$ of $p(i)$, where the median filter window length is $2N+1$. If the magnitude of the difference between $m(i)$ and $p(i)$ is greater than a predetermined threshold value, $p(i)$ is considered a spurious spike and $p(i)$ is replaced by $m(i)$. Otherwise, $p(i)$ is not considered to be a spike and keeps its value. FIG. 3 shows the injection pressure (dashed line) and the pump intake pressure (solid line) when all the spurious spikes are removed by using this nonlinear filter. FIGS. 4 and 5 show identified and removed spikes from

6

injection pressure and pump intake pressure respectively. Other preprocessing steps may be developed to further improve the reservoir connectivity analysis capability afforded by the disclosed cross spectral analysis method.

5 Cross Spectrum Analysis (Step 16)

Cross spectral analysis may be used to determine relationships between two time series as a function of frequency. Given a two time series $X_i=(x_{i1}, x_{i2})^T$, with a covariance matrix $\Gamma(h)=E(X_{t+h,i}X_{t,j})$, for $i, j=1, 2$, and h is a time delay, then the spectral density matrix is defined as follows:

$$S(w) = \frac{1}{2\pi} \sum_{h=-\infty}^{\infty} \Gamma(h) e^{-i h w} = ((s_{11}(h), s_{21}(h))^T, (s_{12}(h), s_{22}(h))^T)$$

where $S_{21}(w) = S_{12}^*(w)$, and $S_{12}(w)$ is a cross spectrum:

$$s_{12}(w) = \frac{1}{2\pi} \sum_{h=-\infty}^{\infty} E(x_{t+h,1} x_{t,2}) e^{-i h w}$$

The cross spectrum can be separated into amplitude spectrum and phase spectrum:

$$s_{12}(w) = A(w) e^{i \Phi(w)}, \text{ with } \Phi(w) \in (-\pi, \pi]$$

The coherence is defined as:

$$K(w) = \frac{|s_{12}(w)|}{(s_{11}(w) s_{22}(w))^{1/2}}, \text{ with } 0 \leq K \leq 1$$

This coherence measures the linear relation between the two time series $X_i=(x_{i1}, x_{i2})^T$ at frequency w . Direct calculation from the preceding definitions of autocorrelation and cross-correlation of the two series is not practical, but a standard method for estimating the coherence spectrum $K(w)$ and phase spectrum $\Phi(w)$ from two time series $X_i=(x_{i1}, x_{i2})^T$ may be used. Alternatively, any other method for estimating a coherence and phase spectrum may be used.

Example coherence and phase spectra are shown in FIG. 8. In a coherence spectrum plot, the strength of the coherency between two time series, values from 0 to 1.0, is plotted for a normalized frequency range of 0.0 to 0.5: A normalized frequency has units of cycles per second. Therefore, the coherency spectrum shows the coherency between two time series at different frequencies. Compared to this coherency spectrum, a correlation coefficient of two time series could be considered as an "average" coherency between two time series at all frequencies. The coherency plot in FIG. 8 indicates that the two time series of an injector well C-20 injection rate and bottom hole pressures in a producer well C-04 have relatively high coherence at low frequency range (between normalized frequency of 0.025 and 0.075) since the coherency values in this range of normalized frequency is high, i.e. greater than 0.5. There have been previous attempts at converting a single time series of dynamic reservoir information into frequency domain (Fourier transformation) or scale space domain (Wavelet transform). However, none of them attempted to compute and view correlations between two time series at different frequencies or in different scale space.

Example

In some of its embodiments, the disclosed method involves examination of coherence spectra between a time series of a

rate signal (either production or injection) in one well and a time series of pressures from a permanent downhole gauge in another well. If the rate and pressure signals show coherence, they are considered to be hydraulically connected, absent any indications to the contrary from other available information. An example connectivity analysis was conducted for two pairs of injection and production wells that were located in three fault blocks of a producing field as shown in FIG. 6.

The degree of reservoir connectivity between the field producer wells C-04 and C-06 was unknown. Injector well C-20 was injecting water into the same fault block as well C-04. The question is whether producer well C-06 is connected to the injection well C-20 even though it is located in another fault block: fault block 2. FIG. 7 shows the daily injection rate at well C-20 and bottom hole pressures at wells C-04 and C-06. Coherence spectra were examined for two pairs of data: 1. injection rate for C-20 and the bottomhole pressure for C-04, and 2. injection rate for C-20 and the bottomhole pressure for C-06.

Injection and/or bottom-hole pressures are routinely corrupted by non-geologic and man-made or facility-related spurious noises such as choke changes at production wells and malfunction or deterioration of pumping capacities, etc. One type of discontinuity in the correlation between injector and producer is a buildup or shut-in of production at the producer. A step in the initial data processing used in this example is to screen out all buildup pressures at the producing wells. The results of the cross spectral analysis for the producing field example is shown below in the coherence (upper graph) and phase (lower graph) spectra of FIG. 8 (data pair 1) and FIG. 9 (data pair 2). Well C-04 (FIG. 8) shows significant coherence (up to 0.8) with the C-20 injection rates compared to (FIG. 9) well C-06 (up to 0.3), especially at normalized frequencies less than 0.2 cycles/sample. Sloping line 81 in the phase spectrum of FIG. 8 is a running mean average of the phase spectrum over that part of the normalized frequency range. The zero phase line is shown in both FIGS. 8 and 9. Zero phase means that neither time series is leading or lagging the other.

The connectivity information derived using the disclosed methodologies and techniques may be outputted to a printout or display and/or may be used to perform a variety of hydrocarbon management activities, such as hydrocarbon extraction, hydrocarbon production, hydrocarbon exploration, identifying potential hydrocarbon resources, identifying well locations, determining well injection and/or extraction rates, identifying reservoir connectivity, acquiring, disposing of and/or abandoning hydrocarbon resources, reviewing prior hydrocarbon management decisions, and any other hydrocarbon-related acts or activities.

The foregoing is directed to particular embodiments of the disclosed aspects for the purpose of illustration. It will be apparent, however, to one skilled in the art, that many modifications and variations to the embodiments described herein are possible. All such modifications and variations are intended to be within the scope of the present invention, as defined in the appended claims. Persons skilled in the art will also readily recognize that in preferred embodiments at least some of the steps in the present inventive method are performed on a computer, i.e. the invention is computer implemented.

REFERENCES

Bradley, D. A., and Allen, T. T.: "Improving Prudhoe Bay Pulse-Test Data by Processing with Fourier Transforms,"

paper SPE 18124 presented at the 1968 SPE Annual Technical Conference and Exhibition, Houston, Tex., Oct. 2-5, 1968.

Chorneyko, D. M.: "Real-Time Reservoir Surveillance Utilizing Permanent Downhole Pressures—An Operator's Experience," paper SPE 103213 presented at the 2006 SPE Annual Technical Conference and Exhibition, San Antonio, Tex., September 24-27, 2006.

Cooley, James W., and Tukey, John W., "An algorithm for the machine calculation of complex Fourier series," *Math. Comput.* 19, 297-301 (1965).

Hollaender, F., Hammond, P. S., and Gringarten, A. C., "Harmonic Testing for Continuous Well and Reservoir Monitoring," paper SPE 77692 presented at the 2002 SPE Annual Technical Conference and Exhibition, San Antonio, Tex., September 29-Oct. 2, 2002.

Jansen, F. E., and Kelkar, M. G., "Application of Wavelets to Production Data in Describing Inter-Well Relationships," paper SPE 38876 presented at the 1997 SPE Annual Technical Conference and Exhibition, San Antonio, Tex., Oct. 5-8, 1997.

Olsen, S. and Nordtvedt, J.-E., "Automatic Filtering and Monitoring of Real-Time Reservoir and Production Data," paper SPE 96553 presented at the 2005 SPE Annual Technical Conference and Exhibition, Dallas, Tex., Oct. 9-12, 2005.

Snedden, J. W., D. Nummedal, and A. F. Amos, "Storm and Fairweather combined-flow on the central Texas continental shelf," *Jour. Sed. Pet.* 58, 580-595 (1988).

The invention claimed is:

1. A method for quantitatively assessing connectivity between two wells in a subsurface region for the purpose of planning or managing production of hydrocarbons from the subsurface region, comprising:

obtaining for each of at least two wells a time series of measurements characterizing a physical or operating condition of the well as a function of discrete time from a downhole monitoring gauge disposed within the well; resampling each of the time series of measurements at a different time interval;

comparing, in a computer system, spectral content of a first time series of measurements from a first well of at least two wells to spectral content of a second time series of measurements from a second well of at least two wells, wherein said comparison between wells of spectral content of time series of measurements comprises:

- obtaining for each of the wells the time series of measurements characterizing the physical or operating condition of the well, said physical or operating condition being selected to show coherence between the two wells only if the wells are hydraulically connected through the subsurface region;
- estimating either cross-spectral coherence or both cross-spectral coherence and phase of the two time series, wherein coherence or phase is estimated by a mathematical computation of cross-spectral coherence or phase, yielding numerical values of coherence or phase at varying frequencies; and
- quantitatively assessing connectivity between the two wells using the estimated coherence or the estimated coherence and phase; and

based on the comparison, determining connectivity between the at least two wells; and based on the connectivity determination, managing production of hydrocarbons from the subsurface region using the well connectivity assessment.

2. The method of claim 1, further comprising resampling the two time series with sampling intervals based on esti-

9

mated response time between the two wells, and using the two resampled time series in the estimating of coherence or phase.

3. The method of claim 2, further comprising detrending and normalizing the two time series before the estimating of coherence or phase.

4. The method of claim 3, further comprising detecting and deleting spiking noises in the two time series of measurements before the estimating of coherence or phase.

5. The method of claim 1, wherein the physical condition of the well is pressure or temperature.

6. The method of claim 1, wherein the operating condition of the well is injection rate, production rate, or flow rate.

7. The method of claim 2, wherein the resampling comprises determining new sampling time intervals, said new intervals being longer than time intervals in the two time series of measurements, and the measurements are sampled using an average of values in a sampling interval.

8. The method of claim 4, wherein detecting and deleting spiking noises in the time series of measurements comprises applying a time window to the series, said time window containing a plurality of time intervals and associated measurement values of the series, including a central measurement value located at the window's middle, then computing a median value of the measurements within the window and replacing the central measurement value by the median value if the difference between the median value and the central measurement value exceeds a pre-determined threshold value.

9. The method of claim 8, wherein the window includes $2N+1$ time intervals of the measurement series, where N is an integer.

10. A method for quantitatively assessing connectivity between two wells in a subsurface region for the purpose of planning or managing production of hydrocarbons from the subsurface region, comprising:

- (a) obtaining for each of the two wells from a downhole monitoring gauge disposed within the well a time series of measurements characterizing a physical or operating condition of the well as a function of discrete time, said physical or operating conditions being selected to show coherence between the two wells only if the wells are hydraulically connected through the subsurface region;
- (b) pre-processing the two time series of measurements by performing one or more of:
 - resampling the two time series with sampling intervals based on estimated response time between the two wells;
 - detrending and normalizing the two time series; and
 - detecting and deleting spiking noises in the two time series of measurements;
- (c) estimating either coherence, or both coherence and phase, between the two pre-processed time series, wherein coherence or phase is estimated by a mathematical computation of cross-spectral coherence or phase, yielding numerical values of coherence or phase at varying frequencies;
- (d) assessing connectivity, with a computer system, between the two wells using the estimated coherence or using both the estimated coherence and phase; and
- (e) managing production of hydrocarbons from the subsurface region using the well connectivity assessment.

11. The method of claim 10, wherein coherence is estimated by plotting the two time series and performing a visual inspection.

12. A method for quantitatively assessing connectivity between two wells in a subsurface region for the purpose of

10

planning or managing production of hydrocarbons from the subsurface region, comprising:

obtaining for each of at least two wells a time series of measurements characterizing a physical or operating condition of the well as a function of discrete time from a downhole monitoring gauge disposed within the well; resampling each of the time series of measurements at a different time interval;

comparing, in a computer system, spectral content of a first time series of measurements from a first well of at least two wells to spectral content of a second time series of measurements from a second well of at least two wells, wherein said comparison between wells of spectral content of time series of measurements comprises:

(a) obtaining for each of the wells the time series of measurements characterizing the physical or operating condition of the well, said physical or operating condition being selected to show coherence between the two wells only if the wells are hydraulically connected through the subsurface region;

(b) estimating either cross-spectral coherence or both cross-spectral coherence and phase of the two time series, wherein estimating cross-spectral coherence and phase of the two time series comprises transforming autocorrelation and cross-correlation of the two time series to frequency domain, then from that, determining coherence and phase of the two series at a plurality of frequencies to produce a coherence spectrum and a phase spectrum; and

(c) quantitatively assessing connectivity between the two wells using the estimated coherence or the estimated coherence and phase; and

based on the comparison, determining connectivity between the at least two wells; and

based on the connectivity determination, managing production of hydrocarbons from the subsurface region using the well connectivity assessment.

13. The method of claim 12, further comprising resampling the two time series with sampling intervals based on estimated response time between the two wells, and using the two resampled time series in the estimating of coherence or phase.

14. The method of claim 13, further comprising detrending and normalizing the two time series before the estimating of coherence or phase.

15. The method of claim 14, further comprising detecting and deleting spiking noises in the two time series of measurements before the estimating of coherence or phase.

16. The method of claim 12, wherein the physical condition of the well is pressure or temperature.

17. The method of claim 12, wherein the operating condition of the well is injection rate, production rate, or flow rate.

18. The method of claim 13, wherein the resampling comprises determining new sampling time intervals, said new intervals being longer than time intervals in the two time series of measurements, and the measurements are sampled using an average of values in a sampling interval.

19. The method of claim 15, wherein detecting and deleting spiking noises in the time series of measurements comprises applying a time window to the series, said time window containing a plurality of time intervals and associated measurement values of the series, including a central measurement value located at the window's middle, then computing a median value of the measurements within the window and replacing the central measurement value by the median value if the difference between the median value and the central measurement value exceeds a pre-determined threshold value.

11

20. The method of claim **19**, wherein the window includes $2N+1$ time intervals of the measurement series, where N is an integer.

* * * * *

12